



CTC 380 S Series

Compact Oil heating boiler

The new CTC 380 S is a thoughtful, up-to-date solution for progressive heating. The reliable but nevertheless futuristic technology of this boiler really corresponds to the present market demands.

All sizes in the serie of CTC 380 S are available as Compact-Unit, i.e. with adapted oil Unit- burner and adapted, extensional Comfort-control.

Classical familiar characteristics such as water- and flue gas connections both on the top and rear side of the boiler goes without saying.

The well-known turbulator concept as well as the large water content are maintained in a refined way.

Under the beautifully shaped casing hides a emission-minimizing and energy-optimizing piece of power.

The skin-tight heat insulation, the genuine 3-stroke flue gas system and the efficient DUO-Temperature System are some points which guarantees that.


Key Features

- 3-stroke flue gas system for firing with a minimum of emissions and energy losses
- Water- and flue gas connections on the top as well as the rear side of the boiler
- Efficient DUO-Temperature System for long-life operation
- Well-tried carefully prepared turbulator concept to obtain high energy utilization and optimal operation conditions
- Very maintenance-friendly – space-generous burner door and easily accessible combustion surfaces

Water- and flue gas connections

Solid, skin-tight heat insulation

DUO-Temperature system

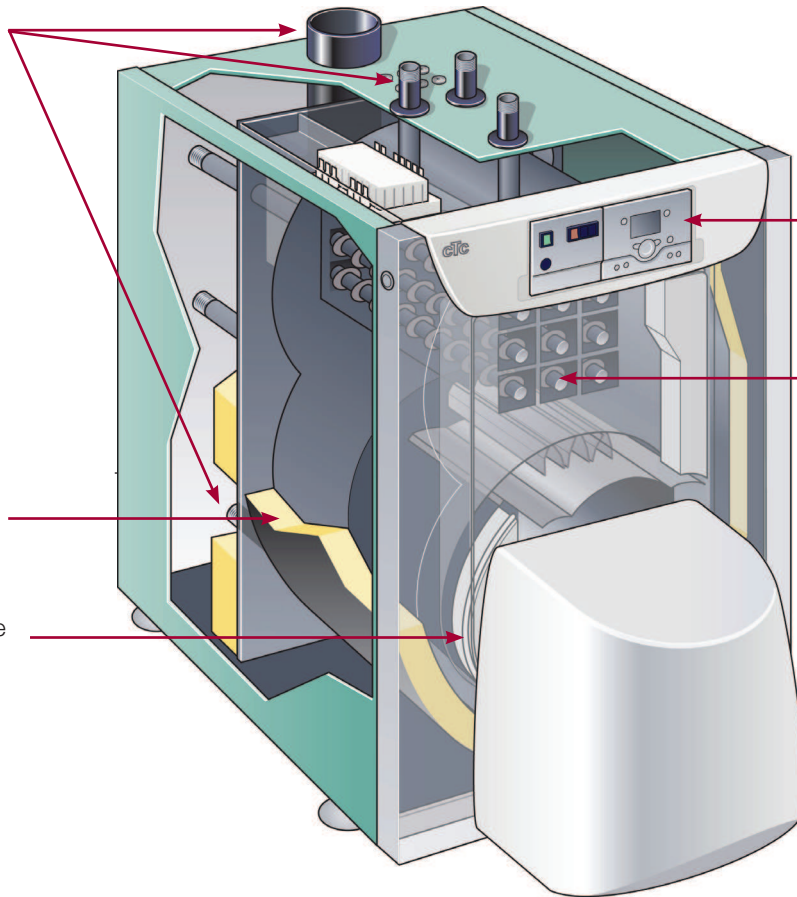

Weather-compensated control unit

3-stroke flue gas system

CTC 380 S Series	18	22	27	33	40	50	63
Rated output, kW	18,3	22	27,3	33,9	39,7	51,6	61,6
Operation pressure, bar	3	3	3	3	3	3	3
Water content, l	98,5	98,5	92	92	92	79	79
Weight, kg	187,5	187,5	191	199,5	199,5	225	230
Measurements H/W/D, mm	1183 x 600 x 895						